



NAME: LED Wall Pack Light


P/N : WPS-70602-05

Advantages

- UL, cUL, DLC
- IP65 Internal driver,
- Input voltage 100-277V AC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury

Applications

- ◆ Entrance lighting, courtyard lighting
- ◆ Industrial lighting, outdoor landscape lighting
- ◆ Hotels
- ◆ Wall lighting

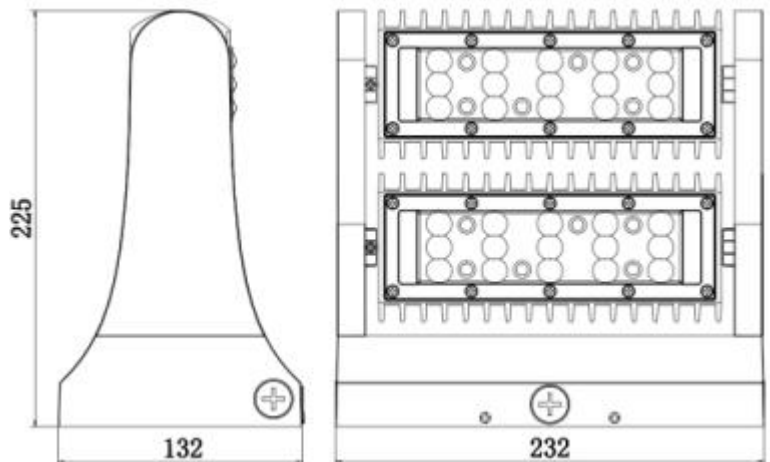

PRODUCT SPECIFICATIONS	
Product name	LED Wall Pack Light
Light Type	Corn Light
Part No	WPS-70602-05
Dimensions	9.1" x 5.2" x 8.8" (232mm x 132mm x 225mm)
Technical Characteristics	
Cover	Clear
Color temperature	5000K
CRI	> 70
Lumens	7700lm
Luminous Efficacy	128 lm/W
Input Power	60 W
Viewing Angle	60 degree
Input Voltage	100-277V AC 50/60Hz
PFC	>90%
Driver Model	China brand driver
Waterproof Rating	IP65
MATERIALS	
LED Brand	CREE
LED Type	MHB-B
LED QTY	20 PCS
Housing	Aluminum
Housing color	Black
OTHER	
Operating Temperature	-4°F to +113°F (-20°C to +45°C)
Operating Humidity	20%-90% RH
Storage Temperature	-22°F to +176°F (-30°C to +80°C)
Storage Humidity	10%-95% RH
Application	Indoor/Outdoor
Safety Certification	UL, cUL, DLC
Warranty Time	5 Years



Exxon Lighting Corporation

Tel: +1-941-404-6437
www.exxonlighting.com

Fax: 1-866-619-0925
E-mail: sales@exxonlighting.com

Light Distribution Testing Parameters


DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.43 lm/W			
MODEL		I _{max} (cd)	9609	S/MH (C0/180)	0.83
NOMINAL POWER (W)	60	LOR (%)	100.0	S/MH (C90/270)	0.78
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7853.9	η UP, DN (C0-180)	0.1, 53.6
NOMINAL FLUX (lm)	7853.91	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2, 46.1
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120.0	η down (%)	99.7	CIBSE SHR MAX	0.80

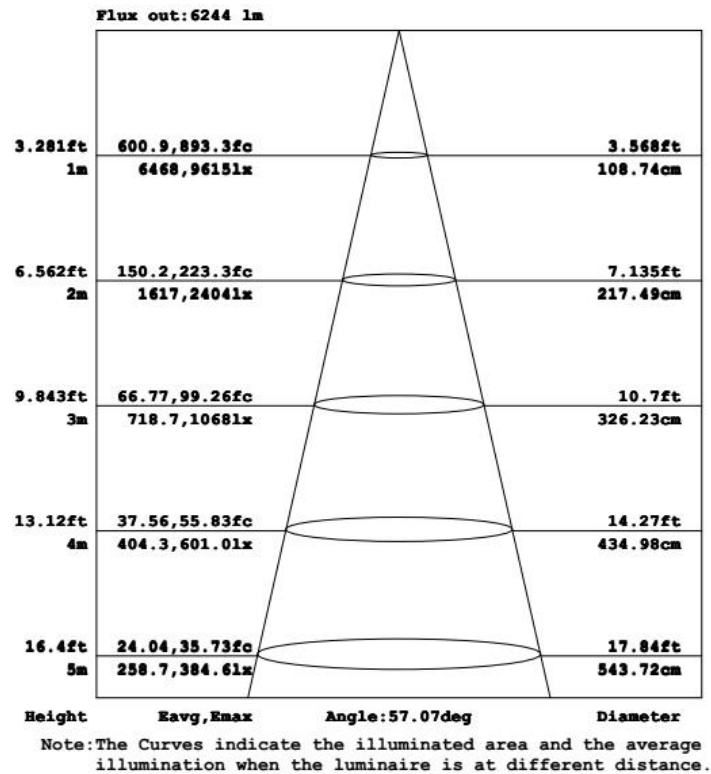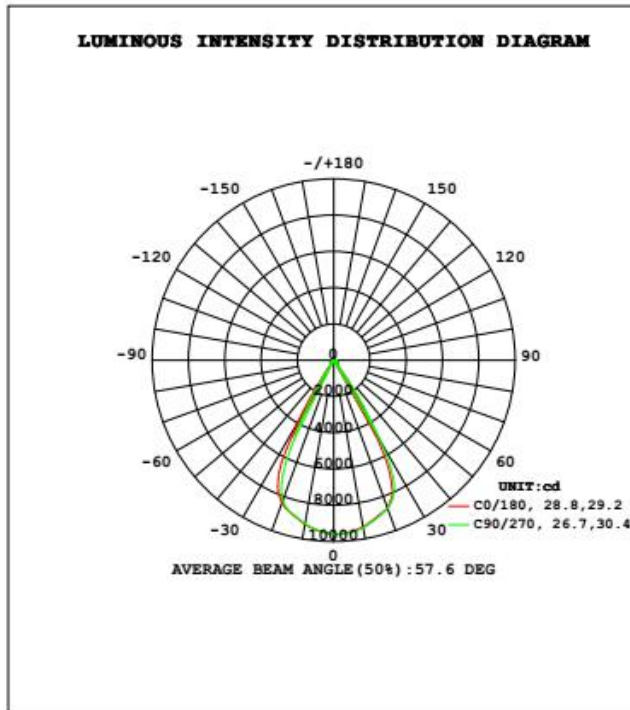

Package

Lamps Net Weight: 6.6 lbs (3 kg)

	Size	Qty/Carton	Weight/Carton
Outer box	19.5" x 11.6" x 13.2"	4	30.4 lbs

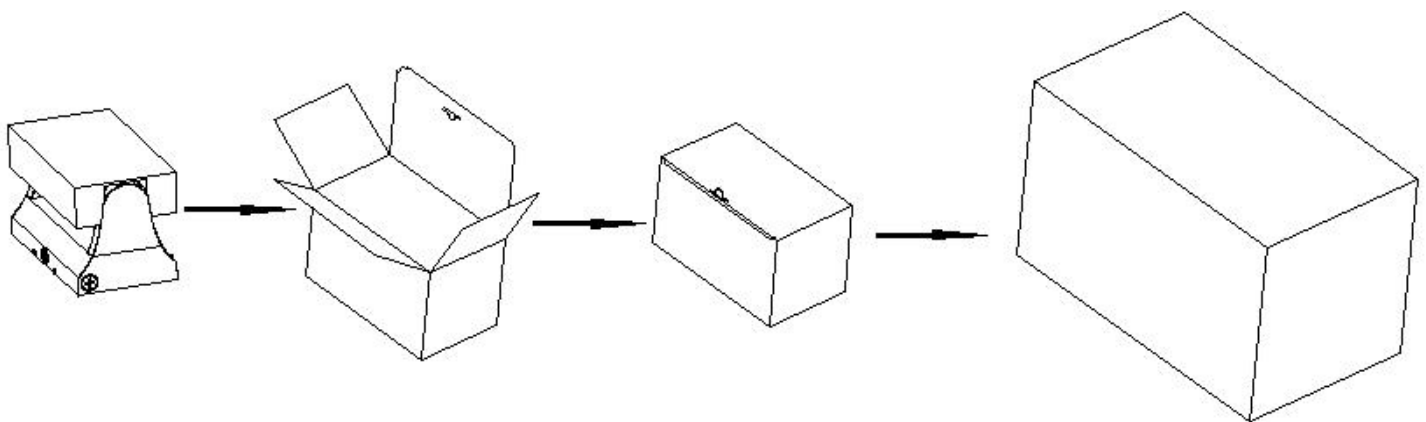

Notice For User

- ◆ Turn off the power before installing or changing the assembly parts.
- ◆ The input voltage and lamp should be matched.
- ◆ Make sure the wiring is insulated.
- ◆ Professionals only should install or disassemble the lamps.

Troubleshooting

Problem	Check points
Flickering of the lamp	Turn off the power and turn on again in 3 minutes. If same phenomena occurs, call a technician
Not working	Check the connections